

A62 HIGH DENSITY WIRE TO BOARD CONNECTOR (CRIMP HOUSING)

PITCH: 1.27mm * 2.54mm

SPECIFICATIONS

Material

Insulator : Nylon 66, glass reinforced, rated UL 94V-0

Electrical

Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.





Insulation Resistance : 1000 MΩ min.

Dielectric Withstanding Voltage : 250V AC for 1minute


Operating Temperature : -40°C to +105°C

▶ Crimp Terminal Insertion : A62c series.

▶ Mating Suggestion : A69, A69a, C07a, C07b, C07c, C08a, C08b & C08c series.

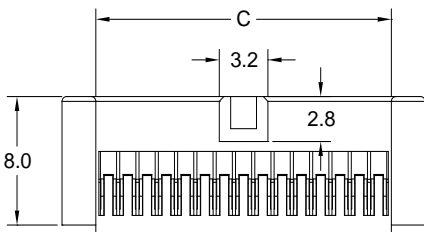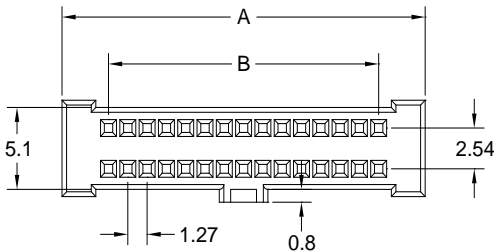

POSITION	A	B	C
10	11.20	5.08	6.75
14	13.74	7.62	9.29
16	15.01	8.89	10.56
20	17.55	11.43	13.10
26	21.36	15.24	16.91
30	23.90	17.78	19.45
34	26.44	20.32	21.99
40	30.25	24.13	25.80
50	36.60	30.48	32.15
60	42.95	36.83	38.50
68	48.03	41.91	43.58
70	49.30	43.18	44.85
80	55.65	49.53	51.20
90	62.00	55.88	57.55
100	68.35	62.23	63.90



How to order: A62 - 1 - 2 - G(RoHS)

1.NO. OF CONTACT	2.INSULATOR COLOR
10 14 16 20 26 30 34 40 50 60 68 70 80 90 100	1. BLACK

